


Sizewell C Notice to Mariners No 24 of 2026

Desalination Intake and Outfall – Pipe Pull Works and Diving Operations

Mariners are advised that -

On or about the 3rd June 2026, works will commence to pull in the pipe to line the Desalination (desal) intake and outfall. These works are complex and will involve several vessels and the jack-up barge NP497. Diving operations will take place and a floating pipeline approximately 500m in length will be towed into the harbour.

The majority of the works will take place within the Marine Construction Zone (MCZ), but the floating pipe towage and installation will extend into the greater harbour – a guard vessel will attend the seaward end of the pipe.

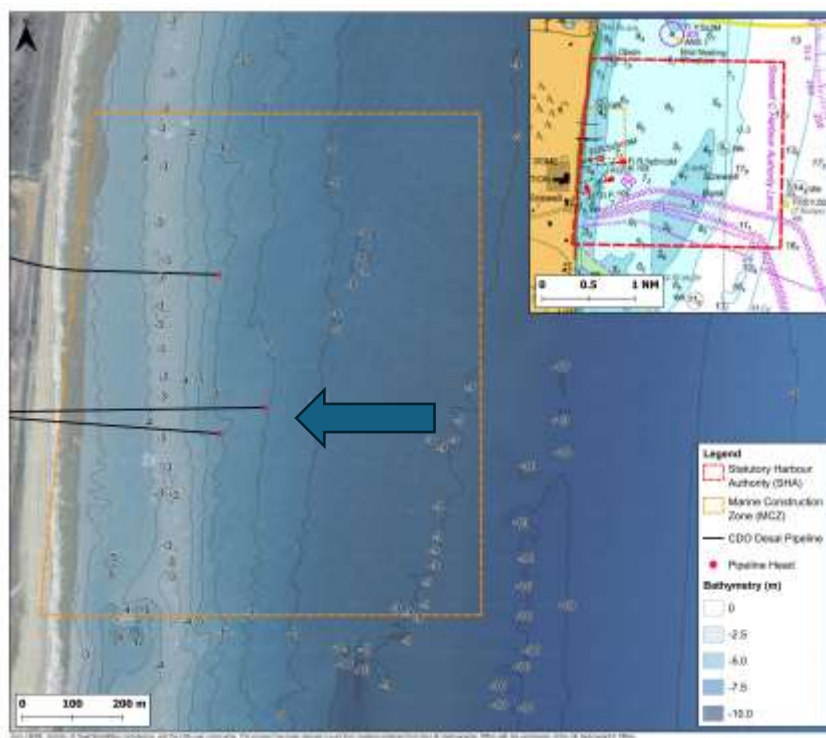

Blue arrow in drawing above indicates relative position of Desal intake/outfall pipeline and heads.

The first element of the works will entail the positioning of the JUB NP497 close to the punch-out position of the tunnelling, as shown in **Figure 1**. The multicat *C-Odyssey* will then moor to the four-point mooring spread to support NP497 in the pipe-pull which will involve diving operations.

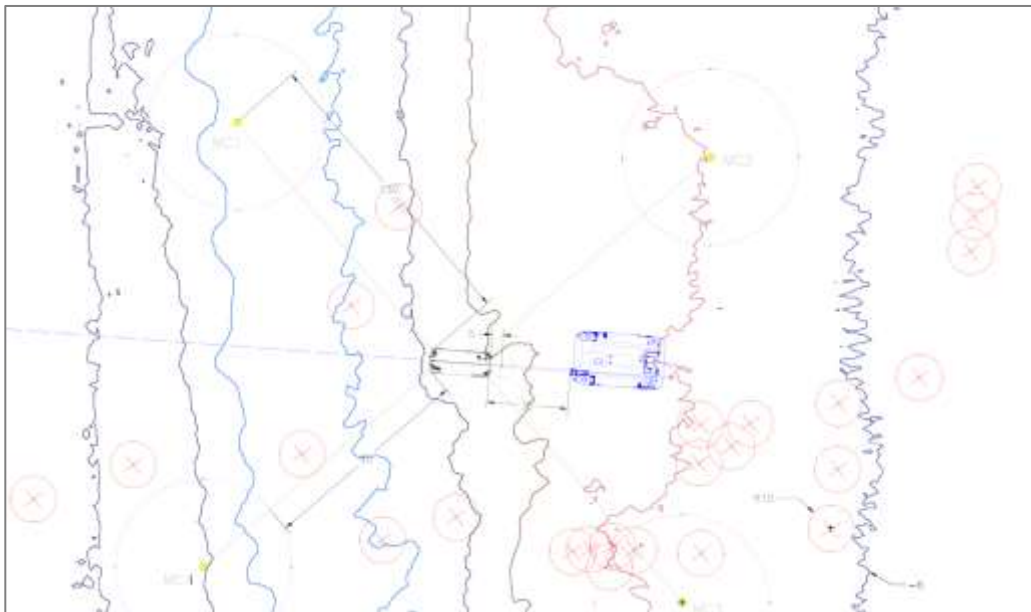


Figure 1 - Location of JUB N497 & C-Odyssey Mooring Spread

CDOPunchout Location	52°13.116' N	001°37.756' E
CDO Mooring Clump 1	52°13.172' N	001°37.654' E
CDO Mooring Clump 2	52°13.166' N	001°37.834' E
CDO Mooring Clump 3	52°13.062' N	001°37.826' E
CDO Mooring Clump 4	52°13.116' N	001°37.752' E

Meanwhile the 500m long floating pipe will be under tow from its storage in the River Stour, and the tow will be conducted by the **C-Odyssey, MTS Valour** supported by the guard vessels **Paul-D and Sophia-D**. The towage configuration is shown in **Figure 2**.

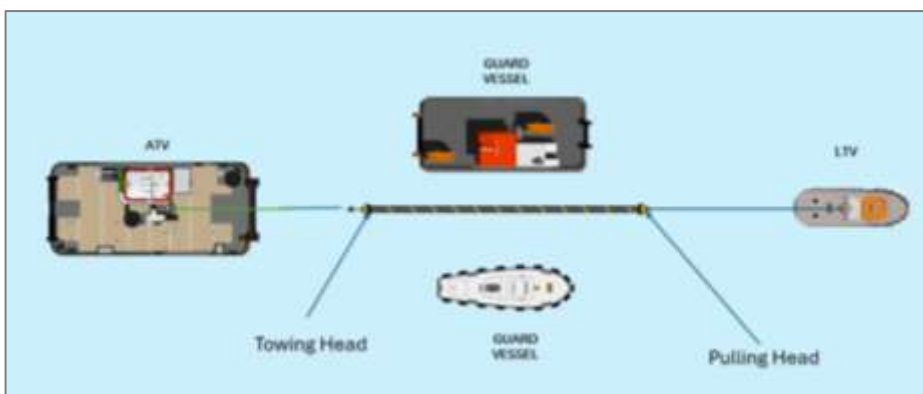


Figure 2 - Towage configuration during pipe-pull

Once ready to commence the pipe-pull, the pipe will be fed onto the JUB **NP497** to begin the pull in. During the initial phase of the pull-in, a significant length of the floating pipeline will extend to seaward and will be tended by the **MTS Valour, Paul D and C-Odyssey**.

Neil Glendinning

SZC Harbour Master

Date: 30/05/2026

Any further enquiries regarding this Notice to Mariners should be directed to:

Harbour.Master@sizewellc.com

This notice will be cancelled on completion of works.

Notice to Mariners in Force

No.15 of 2024, No.19 of 2024, No.10 of 2025, No.6 of 2026, No.7 of 2026, No.8 of 2026
No.11 of 2026, No.12 of 2026, & No.14 of 2026.