

Sizewell C Notice to Mariners No 26 of 2026

Works adjacent to Sizewell C Harbour


Mariners are advised that:

From 30th June 2026 Horizontal Directional Drilling (HDD) and duct installation work will commence on the EA1N and EA2 wind farm export cable pre-installation works and will continue for approximately twelve months.

The works will comprise drilling and installation of 4 no. 800mm OD x 1800 metre ducts.

This work will focus around a Jack-Up Barge (JUB) that will be located within an area centred on the co-ordinates shown on the chart in **Figure 1** below and will include associated survey and diving activity as well as HDD drilling and duct installation work.

Figure 1: EA1N and EA2 Wind Farm Marine Works Location and JUB exclusion zone

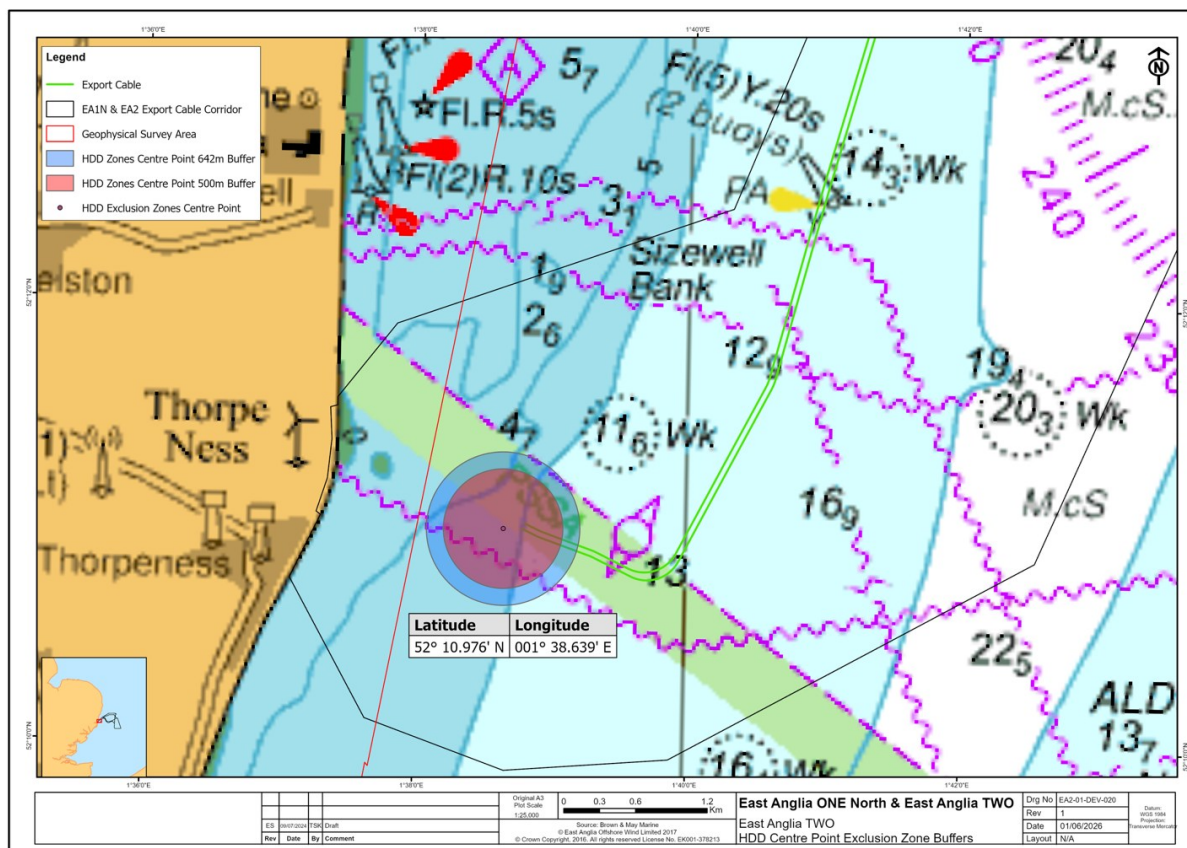

A significant number of construction vessels comprising a Jack-Up Barge, tugs, multcats, flat-top barges, crew transfer vessel and other support vessels will be engaged on this project (see Marine Plant in **Figure 2** overleaf).

Construction activity will take place around the JUB apart from those vessels transiting between the works and Lowestoft or Southwold Harbour.

Mariners are requested to maintain a 500m exclusion zone from the JUB and exercise additional vigilance and an effective lookout when transiting the area during this period of increased marine activity. All vessels engaged in these works will abide by and display all shapes and lights required by the COLREGS. Vessels will monitor VHF Channels 12 and 16.

Please note that there will be a number of occasions when the exclusion zone will need be extended and these events will be subject to additional Notices issued as required.

Figure 2: Marine plant involved in EA1N and EA2 marine works

	<p>Haven Seachallenger</p> <ul style="list-style-type: none"> • Accommodation for 25 persons • Max Payload 1000t • 50m x 24m x 2.5m • 200t crane 		<p>Ocean Supplier</p> <ul style="list-style-type: none"> • Multicat • 35t Bollard Pull • 26m x 11m x 2.6m
	<p>Fionn Mac Cumhaill</p> <ul style="list-style-type: none"> • 12 PAX • Bow Loading Platform • Jet-Driven 		<p>Cu Chulainn</p> <ul style="list-style-type: none"> • Redbay Stormforce 850 • Bow Loading Platform
	<p>MTS Valour</p> <ul style="list-style-type: none"> • Shoalbuster Tug • 23m x 8.6m x 2.3m • 22t Bollard Pull 		

SZC Harbour Master

Date: 11/06/2026

Any further enquiries regarding this Notice to Mariners should be directed to the ICCB project manager – Tony Lock at: t.lock@iccb.ie

Notices to Mariners in Force

No15 of 2024, No19 of 2024, No.10 of 2025, No.6 of 2026, No.8 of 2026 No.11 of 2026, No.12 of 2026, No.14 of 2026, No24 of 2026